


Easy Piecing Instructions



1. Cut out squares of Fabric. Use the Layout as a placement guide. Place **WRONG SIDE** of fabric to **BUMPY** or **FUSIBLE** side of the printed interfacing. ***MAKE SURE THE FUSIBLE SIDE IS UP!!**

The dotted lines make it easy to know where to put your fabric squares. Don't worry if they haven't been cut perfectly-- if the square is caught in the consistent seam allowance it creates perfect intersections!

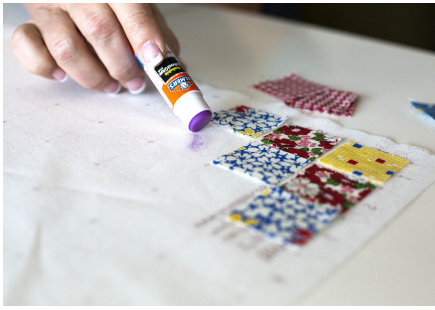

2. **PRESS** – not iron – for a few seconds, then lift the iron and place it again, until the entire panel is secured.



3. Fold on the **DOTTED** line(fold line), making sure the dots are running right along the fold. Sew a 1/4" seam allowance. Continue this step along all vertical rows.

4. Snip right to the seam at each intersection. Press each row in opposite directions- use steam. Turn over and press the right side of the fabric, making sure the seams are laying flat.



5. Fold the row right sides together- notice the intersections naturally nestle into each other! Sew a 1/4" seam allowance. Continue this step on all horizontal rows. Press well, using steam.



6. Stitch each completed panel together, using a 1/4" seam allowance, being careful to nestle seams at intersections. You may want to use pins. Press well, using steam. Notice perfect intersections! No segmented seams on the back! Flat, stable quilt top!